

# PixelSensor™


## Multispectral Sensors

### Multispectral Sensors for Compact Devices


PixelSensor™ multispectral sensors use on-chip filtering to pack up to 8 wavelength-selective photodiodes into a compact 9 mm x 9 mm array for simple integration into optical devices. A single PixelSensor replaces multiple components, helping OEMs shrink multi-wavelength instruments for applications including in vitro diagnostics, biochemical assays and colorimetry applications.

PixelSensor's wafer-level optical filters split the spectrum into 8 discrete color bands and suppress out-of-band background light, improving contrast and sensitivity. PixelSensor offers narrowband selectivity (400-1000 nm), is available in OEM versions with user-defined spectral bands, and can be specified with optional electronics board and accessories for rapid prototyping and development.


## VIS Spectral Response

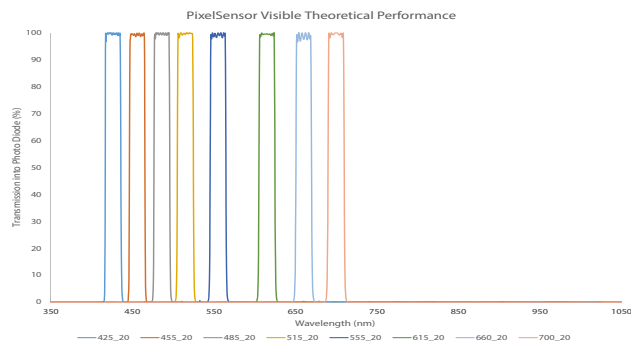


## VIS-NIR Spectral

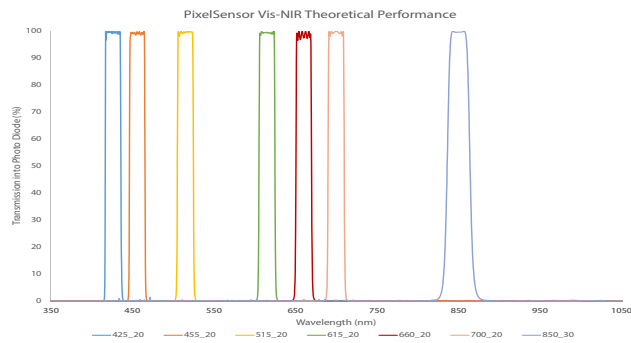

## NIR Spectral

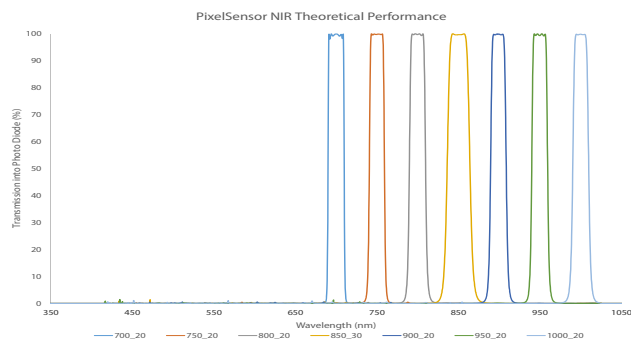

## PCR Spectral

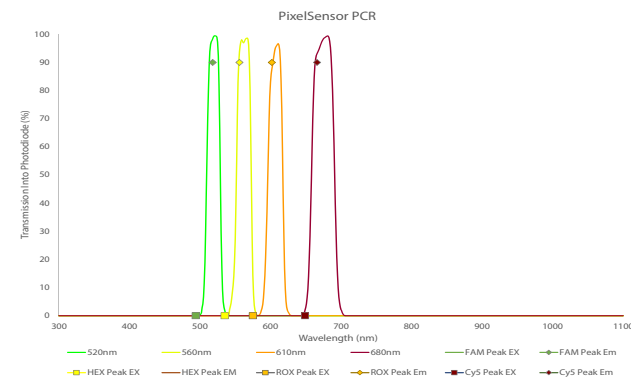


## Photodiode Performance Characteristics

Characteristic	Symbol	Test	Min	Typical	Max	Unit
Dark current	$I_D$	$V_R = 10V$		2	8	nA
Shunt resistance	$R_{SH}$	$V_R = 10mV$		100		MΩ
Junction capacity	$C_j$	$V_R = 0V, f=100kHz$ $V_R = 50V, f=100kHz$		6 0.6	7 0.7	pF
Spectral range	range	Spot scan	400		1100	nm
Breakdown voltage	$V_{BR}$	$I = 10\mu A$		75		V
Noise equivalent power	NEP	$V_R = 5V @ = peak$		$5 \times 10^{-14}$		
Response time	$t_r$	$R_L = 50 \Omega, V_R = 50V$		6.0		ns
<b>Absolute maximum rating</b>						
Reverse voltage	$V_{BR}$			75		V
Operating temperature	$T_O$		-40	to	+80	°C

## LCC Sensor

Spectral filters	Standard and custom 10-100 nm FWHM
Photodiodes	Si, 1.0 x 0.8 mm
Package	LCC 20

## LCC Dimensions

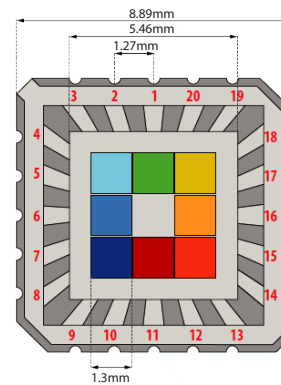

## Optional Evaluation Housing




- Mechanical fixture including:
- 15.2 mm light guide
  - SM05 lens adapter
  - Fiber optic adapter for 74-UV collimating lens

## OEM Board Specifications

Integration time	1-1024 ms
Gain reference	20-5120 nAvv
Interface	USB 2.0
Protocol	HID-compliant
Software	Windows 32/64-bit compatible

## OEM Board Dimensions (inches/mm)

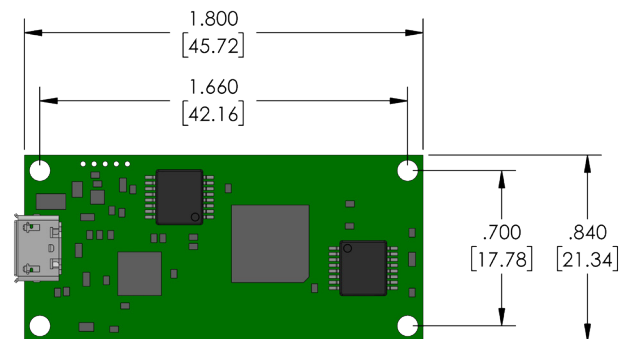

info@salvotechnologies.com · sales@salvotechnologies.com  
www.salvotechnologies.com US +1 888-725-8605 · +1 727-544-3736